

E-PACE

JAGUAR



TECHNICAL SPECIFICATION
NOVEMBER 2022

E-PACE - TECHNICAL SPECIFICATION

	DIESEL MHEV
POWERTRAIN	D200
Mild Hybrid Electric Vehicle (MHEV)	■
Transmission	Automatic
Driveline: All Wheel Drive (AWD) or Front Wheel Drive (FWD)	AWD
Maximum power (PS/kW/rpm)	204/150/3,750
Maximum torque (Nm/rpm)	430/1,750-2,500
Capacity (cc)	1,997
No. of cylinders/Valves per cylinder	4/4
Cylinder layout	In-line
Bore/stroke (mm)	83/92.31
Compression ratio (:1)	16.5+/-0.5
PERFORMANCE	
Acceleration (secs) 0-60mph (0-100km/h)	7.9 (8.4)
Maximum speed mph (km/h)	131 (211)
BRAKES	
Front type	Twin Piston Sliding Caliper, Vented Disc
Front diameter (mm)	349
Rear type	Single Piston Sliding Caliper, Solid Disc
Rear diameter (mm)	300
Park Brake	iEPB, Motor on Caliper

■ Standard - Not available.

Some features on images may vary between optional and standard for different model years and due to the impact of Covid-19, many of our images have not been updated to reflect 24MY specifications. Please refer to the car configurator and additionally consult your local Retailer for detailed 24MY specifications and do not base an order on website imagery alone. Jaguar Land Rover Limited is constantly seeking ways to improve the specification, design and production of its vehicles, parts and accessories and alterations take place continually, and we reserve the right to change without notice.

E-PACE – TECHNICAL SPECIFICATION

	DIESEL MHEV
WEIGHTS (kg)*	D200
Unladen weight (EU)**	1,952
Unladen weight (DIN)†	1,877
Gross Vehicle Weight (GVW)	2,470
TOWING (kg)	
Unbraked trailer	750
Maximum towing	2,000
Maximum coupling point (nose weight)	100
Maximum vehicle and trailer combination	4,470
ROOF CARRYING (kg)	
Maximum roof load (including cross bars)	75

*Weights reflect vehicles to standard specifications. Optional extras increase weight. **Includes a 75 kg driver, full fluids and 90 percent fuel. †Includes full fluids and 90 percent fuel.

E-PACE - TECHNICAL SPECIFICATION

			DIESEL MHEV
FUEL ECONOMY			D200
Fuel tank capacity - useable litres	Large		65
Diesel Particulate Filter (DPF)			■
WLTP*			
WLTP Consumption	Low	mpg (l/100km)	37.7 - 34.4 (7.5 - 8.2)
	Medium	mpg (l/100km)	43.5 - 39.2 (6.5 - 7.2)
	High	mpg (l/100km)	51.4 - 46.3 (5.5 - 6.1)
	Extra High	mpg (l/100km)	44.1 - 39.8 (6.4 - 7.1)
	Combined	mpg (l/100km)	44.8 - 40.4 (6.3 - 7.0)
WLTP CO ₂ Emissions	Combined	(g/km)	165 - 183

■ Standard.

*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation. For comparison purposes only. Real-world figures may differ. CO₂ and fuel economy figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment and accessories fitted.

E-PACE - TECHNICAL SPECIFICATION

POWERTRAIN	PETROL MHEV		PETROL PHEV
	P160	P250	P300e
Mild Hybrid Electric Vehicle (MHEV)	■	■	-
Transmission	Automatic	Automatic	Automatic
Driveline: All Wheel Drive (AWD)	FWD	AWD	AWD
Maximum power (PS/kW/rpm)	160/118/5,500	249/184/5,500	309/227/5,500*
Maximum torque (Nm/rpm)	260/1,600-4,000	365/1,300-4,500	540/1,600-4,500*
Capacity (cc)	1,498	1,997	1,498
No. of cylinders/Valves per cylinder	3/4	4/4	3/4
Cylinder layout	In-line	In-line	In-line
Bore/stroke (mm)	83/92.29	83/92.29	83/92.29
Compression ratio (:1)	10.5+/-0.5	10.5+/-0.5	10.5+/-0.5
PERFORMANCE			
Acceleration (secs) 0-60mph (0-100km/h)	9.9 (10.5)	7.0 (7.5)	6.1 (6.5)
Maximum speed mph (km/h)	122 (197)	142 (229)	134 (216)
ELECTRIC MOTOR DATA			
Maximum power (PS/kW)	-	-	109/80
Maximum torque (Nm)	-	-	260
BRAKES			
Front type	Twin Piston Sliding Caliper, Vented Disc	Twin Piston Sliding Caliper, Vented Disc	Twin Piston Sliding Caliper, Vented Disc
Front diameter (mm)	349	349	349
Rear type	Single Piston Sliding Caliper, Solid Disc	Single Piston Sliding Caliper, Solid Disc	Single Piston Sliding Caliper, Vented Disc
Rear diameter (mm)	300	300	325
Park Brake	iEPB, Motor on Caliper	iEPB, Motor on Caliper	iEPB, Motor on Caliper

■ Standard - Not available.

*When combined with electric motor.

E-PACE – TECHNICAL SPECIFICATION

	PETROL MHEV		PETROL PHEV
	P160	P250	P300e
BATTERY AND CHARGING TIMES			
Home Charger/Wall box 7 kW	-	-	1.4 h to 80%, 2.2 h to 100%
DC Charger 50 kW	-	-	30 mins to 80% (max rate 32kW)
Domestic Plug 2.3 kW	-	-	5 h to 80%, 6.7 h to 100%
Battery capacity Total (Usable) kWh	-	-	12
Charging cable length (m)	-	-	5
WEIGHTS (kg)*			
Unladen weight (EU)**	1,783	1,889	2,173
Unladen weight (DIN) [†]	1,708	1,814	2,098
Gross Vehicle Weight (GVW)	2,300	2,430	2,670
TOWING (kg)			
Unbraked trailer	-	750	750
Maximum towing	-	1,800	1,600
Maximum coupling point (nose weight)	-	100	100
Maximum vehicle and trailer combination	-	4,230	4,270
ROOF CARRYING (kg)			
Maximum roof load (including cross bars)	75	75	75

- Not available.

*Weights reflect vehicles to standard specifications. Optional extras increase weight. **Includes a 75 kg driver, full fluids and 90 percent fuel. [†]Includes full fluids and 90 percent fuel.

E-PACE - TECHNICAL SPECIFICATION

			PETROL MHEV		PETROL PHEV
			P160	P250	P300e
FUEL ECONOMY					
Fuel tank capacity - useable litres			67	67	57.6
Gasoline Particulate Filter (GPF)			■	■	■
EV Range (WLTP*) miles (km)			-	-	36 - 39 (58 - 62)
WLTP*					
WLTP Consumption	Low	mpg (l/100km)	28.2 - 27.4 (10.0 - 10.3)	24.6 - 23.9 (11.5 - 11.8)	-
	Medium	mpg (l/100km)	36.7 - 35.3 (7.7 - 8.0)	32.8 - 30.4 (8.6 - 9.3)	-
	High	mpg (l/100km)	42.8 - 40.9 (6.6 - 6.9)	38.7 - 34.9 (7.3 - 8.1)	-
	Extra High	mpg (l/100km)	34.9 - 32.8 (8.1 - 8.6)	33.2 - 29.4 (8.5 - 9.6)	-
	Combined	mpg (l/100km)	36.2 - 34.4 (7.8 - 8.2)	32.8 - 30.1 (8.6 - 9.4)	201.8 - 176.6 (1.4 - 1.6)
WLTP CO ₂ Emissions	Combined	(g/km)	177 - 185	194 - 212	31 - 35

■ Standard - Not available.

*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world provide figures may differ. CO₂, fuel economy, energy consumption equipment and range figures may vary according to factors such are shown as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range highest figures are based upon production vehicle over a standardised route.

E-PACE - DIMENSIONS

Vehicle Height - 1,648 mm

Headroom

Maximum front/rear headroom

With Fixed metal roof fitted 976/974 mm

With Panoramic roof fitted 996/970 mm

Legroom

Maximum front legroom 1,018 mm

Maximum rear legroom 872 mm

Loadspace Capacity

Height 712 mm, Width 1,311 mm

Loadspace width between arches 1,057 mm

Maximum loadspace volume behind first row

Dry* 1,170 litres, Wet** 1,386 litres

Maximum loadspace volume behind second row


Dry* 494 litres, Wet** 601 litres

Turning Circle

Kerb-to-kerb 11.63 m

Wall-to-wall 12 m

Turns lock-to-lock 2.31

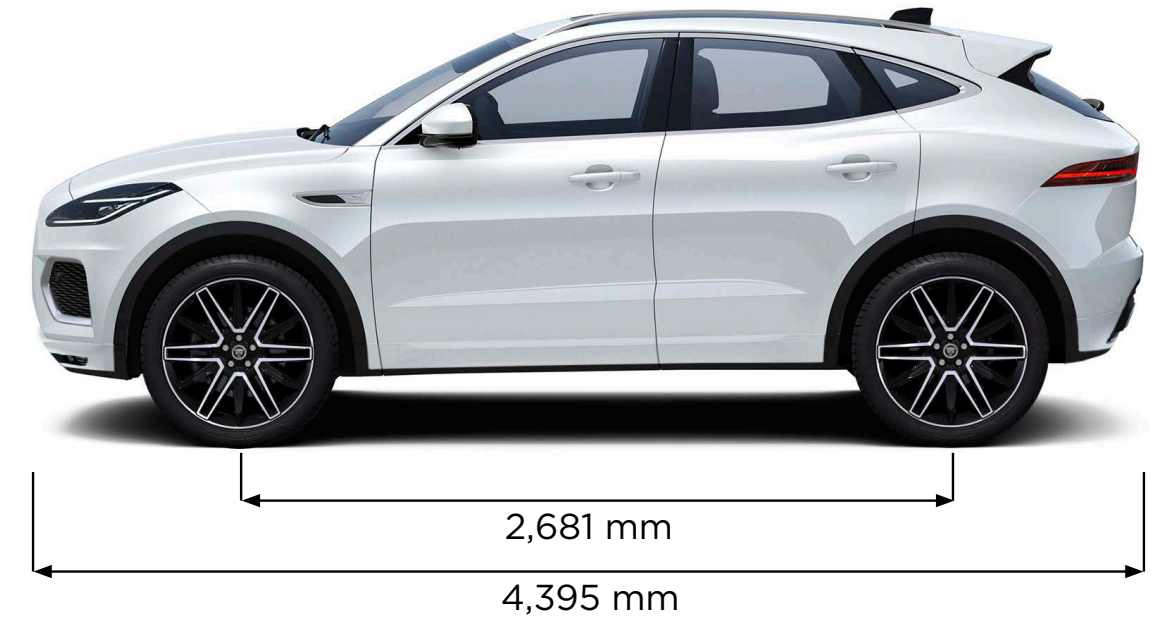

*Dry: Volume as measured with VDA-compliant solid blocks (200 mm x 50 mm x 100 mm).

**Wet: Volume as measured by simulating the loadspace filled with liquid.

Dimensions were measured with vehicle at unladen weight.